



MT (M17) Series

Pilot-operated Type

N.C.

- Suitable for steam, air, inert gases, water, and oil (Below 50 cst).
- Can be mounted in vertical and horizontal position.
- Maximum working temperature up to 200 °C.


Steam

Water

Air

Gas

Oil

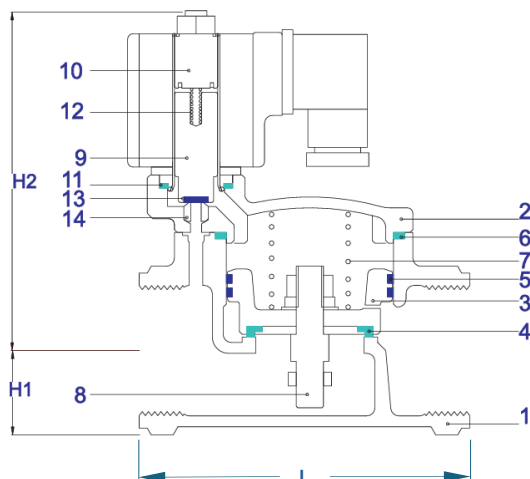

Common Specification

Item	Description	
Fluid	Water, Air, Gas, Oil	Steam
Fluid Temperature	Max. 90°C	Max. 200°C
Power Source	AC 24, 110, 220 50/60Hz DC 12, 24V	
Insulation Class	F Class = Max. 150°C	H Class = Max. 180°C
Power Consumption	AC : 35 VA DC : 26W	
Fluid Viscosity	< 50 cst	
Installation	Vertical / Horizontal	
Operation	Normally Closed	
Coil type	Waterproof : IP65	

Main Parts List

NO.	Descriptions	Material	
		Max. 90°C	Max. 200°C
1.	Valve body	BC6	BC6
2.	Valve bonnet	BC6	BC6
3.	Main valve	BC6	BC6
4.	Main valve seat	Teflon	Teflon
5.	Main valve ring	Carbon Resin	Carbon Resin
6.	Packing	NBR	Teflon
7.	Spring	SUS304	SUS304

NO.	Descriptions	Material	
		Max. 90°C	Max. 200°C
8.	Main valve guide rod	SUS303L	SUS303L
9.	Plunger	KM-31	KM-31
10.	Plunger tube unit	SUS304,KM-31	SUS304,KM-31
11.	Packing	NBR	Teflon
12.	Spring	SUS304	SUS304
13.	Plunger Seat	Viton	Teflon
14.	Pilot hole seat	SUS303L	SUS303L

Model Type

MT - FWAGSHC - M17

Series

Coil · N/A : Iron case · M17 : Waterproof
 Operation · N/A : Normally closed · C : Normally open
 Max. Pressure (kgf/cm²) · N/A : 10 · H : Steam = 16 ; Other = 20
 Media · W : Water · A : Oil · G : Gas · S : Steam
 Connection · N/A : Screw · F : Flange (10K)
 Size · 15 (1/2") · 20 (3/4") · 25 (1") · 32 (1-1/4") · 40 (1-1/2") · 50 (2")

Valve Specification

Model	Connection		Orifice (mm)	Cv Value	Operating Pressure (kgf/cm ²)		Dimension (mm)			Weight (kg)
	Inches	Type			Steam, Water, Air	Oil (< 50cst)	L	H1	H2	
MT-15-M17	1/2"	Screw	20	7.4	0.3 - 10	0.3 - 7	80	18	120	1.7
MT-20-M17	3/4"		20	7.4			80	18	120	1.7
MT-25-M17	1"		25	12.0			100	24	122	2.2
MT-32-M17	1 1/4"		32	15.0			110	28	122	2.5
MT-40-M17	1 1/2"		40	20.0			120	31	125	3.1
MT-50-M17	2"		50	30.0			140	38	132	4.1
MT-32F-M17	1 1/4"	Flange JIS10K	32	15.0	0.3 - 10	0.3 - 7	150	68	122	6.5
MT-40F-M17	1 1/2"		40	20.0			160	70	125	7.3
MT-50F-M17	2"		50	30.0			170	78	132	9.4

* Nor. Closed : 0.3 ~ 16 kgf/cm² · 0.3 ~ 20 kgf/cm² on request. Nor. Open 0.3 ~ 12 kgf/cm² on request

* Min. Operating Pressure ΔP : 0.3 kgf/cm²