

Specifications:


Rated voltage	100~120VAC/1-ph 200~240VAC/1-ph
Acting time	12/10sec. (50/60Hz)
Media	Oil, Air, Water
Fluid temp.	0~100°C Other temp. available on request
Pressure range	Max. 10 kgf/cm ²
Valve material	Cast Iron, SUS 304/316
Valve type	Flanged ball valve
Control method	ON/OFF Modulating
Insulation	IP 67
Certification	CE



Optional


- Heater
- Auxiliary Switches
- Build-in LED position indicator
- Voltage: 12 VDC; 24VAC/DC
- Potentiometer (5k Ohm)

JS-01, 02




Dimension (mm)


MODEL	PIPE SIZE	D	L1	L2	H1	H2
JS-01-25F-3WAY	1"	127	180	90	271	333.5
JS-02-40F-3WAY	1-1/2"	127	200	100	283	353

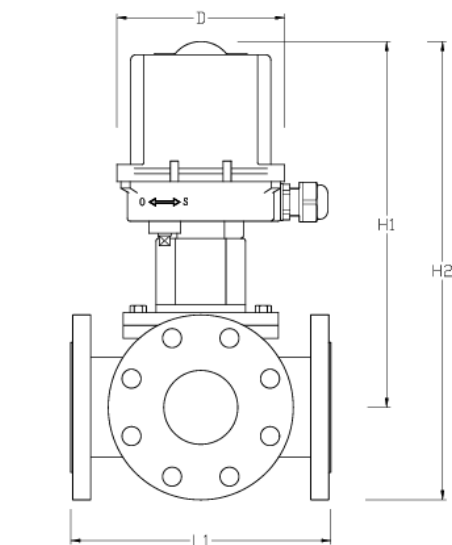

Wiring diagram :110/220 VAC (1-Phase)

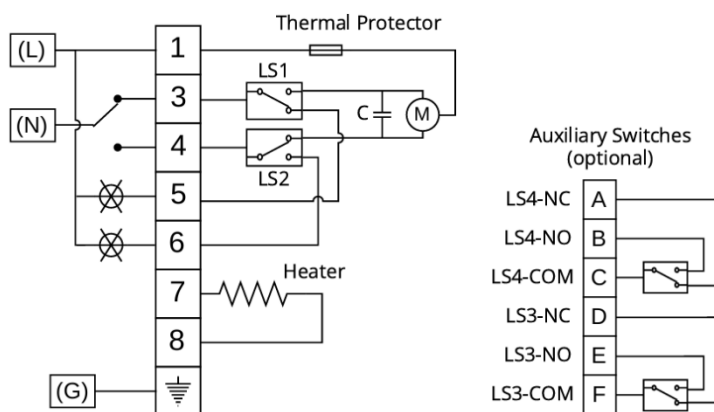


JS-03

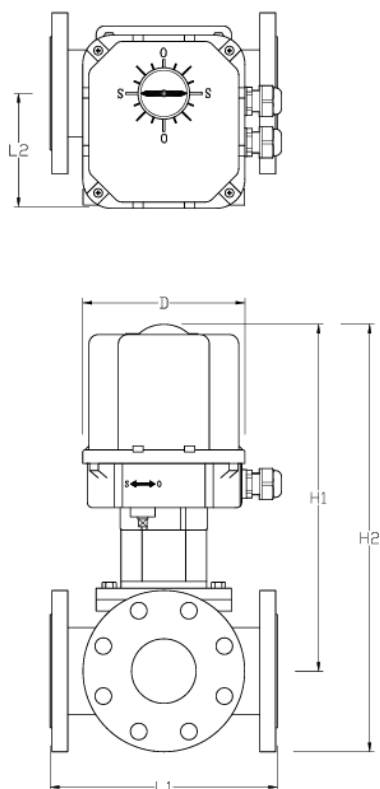

Dimension (mm)

MODEL	PIPE SIZE	D	L1	L2	H1	H2
JS-03-40F-3WAY	1-1/2"	157	200	100	333.5	403.5
JS-03-50F-3WAY	2"	157	220	110	339.5	417
JS-03-65F-3WAY	2-1/2"	157	250	125	364.5	452

JS-03H~06H

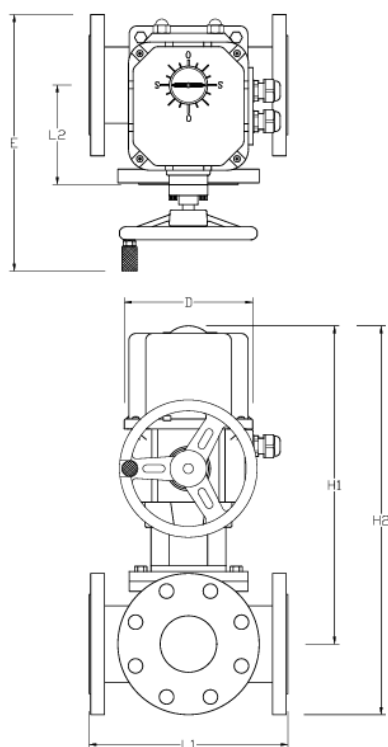

Dimension (mm)

MODEL	PIPE SIZE	D	E	L1	L2	H1	H2
JS-03H-25F-3WAY	1"	163	306	180	90	387	449.5
JS-03H-40F-3WAY	1-1/2"	163	313.5	200	100	399	469
JS-03H-50F-3WAY	2"	163	321	220	110	405	482.5
JS-03H-65F-3WAY	2-1/2"	163	331	250	125	430	517.5
JS-04H-80F-3WAY	3"	163	336	260	130	435	527.5
JS-05H-100F-3WAY	4"	163	348.5	340	170	455	560
JS-06H-125F-3WAY	5"	163	368.5	420	210	497	622
JS-06H-150F-3WAY	6"	163	383.5	432	216	517	657