

JS Motorized Flanged PVC Ball Valve

Common Specification





Item	Description
Operation voltage for On/Off Standard type	• 24VDC • 24VAC/VDC • 110VAC (1PH) • 220VAC (1PH)
Media	Water, acidic and alkaline fluids
Fluid temp.	10~50°C
Pressure range	Max. 10 kgf/cm ²
Valve material	• PVC • PP
Valve type	PVC double union ball valve
Control method	• ON/OFF type • Modulating type
Dust/Waterproof	IP67 according to IEC 60529
Certification	Comply with CE directives

Description

The motorized PVC flanged ball valve is a durable, cost-effective shut-off valve for water, air, and corrosive media such as acids and alkalis.

With excellent chemical resistance and lightweight construction, it is ideal for irrigation, water systems, and corrosive applications, suitable for media temperatures up to 50 °C.

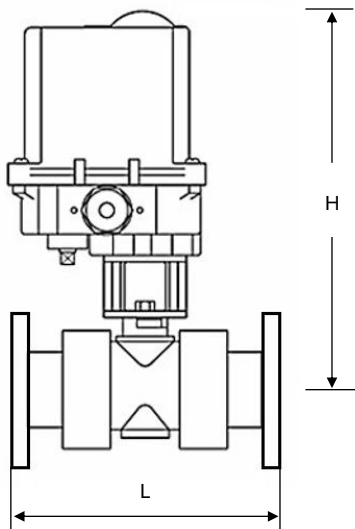

Dimension (mm)

MODEL	PIPE SIZE		L	H	D
	mm	in			
JS-01-15F-PVC	DN15	1/2"	143	213	127
JS-01-20F-PVC	DN20	3/4"	172	219	127
JS-01-25F-PVC	DN25	1"	187	225	127
JS-01-32F-PVC	DN32	1-1/4"	190	236	127
JS-01-40F-PVC	DN40	1-1/2"	212	239	127
JS-02-50F-PVC	DN50	2"	234	256	127