



Specifications:

Rated voltage	100~120VAC/1-ph 200~240VAC/1-ph
Acting time	12/10sec. (50/60Hz)
Media	Oil, Air, Water
Fluid temp.	10~60°C Other temp. available on request
Pressure range	Max. 10 kgf/cm ²
Valve material	SUS 316
Valve type	2-way threaded ball valve
Control method	ON/OFF Modulating
Insulation	IP 67
Certification	CE

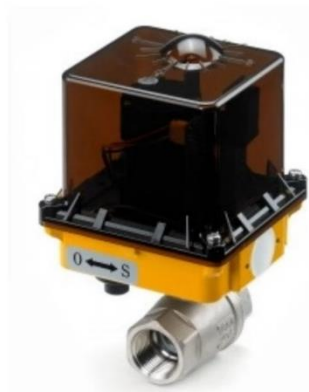


Optional

- Heater
- Auxiliary Switches
- Build-in LED position indicator
- Voltage: 12 VDC; 24VAC/DC
- Potentiometer (5k Ohm)



Dimension (mm)

MODEL	PIPE SIZE	L	H	D
JS-01-15-BLV	1/2"	69	186	127
JS-01-20-BLV	3/4"	80	190	127
JS-01-25-BLV	1"	90	195	127
JS-01-35-BLV	1-1/4"	106	202	127
JS-01-40-BLV	1-1/2"	120	217	127
JS-02-50-BLV	2"	140	223	127

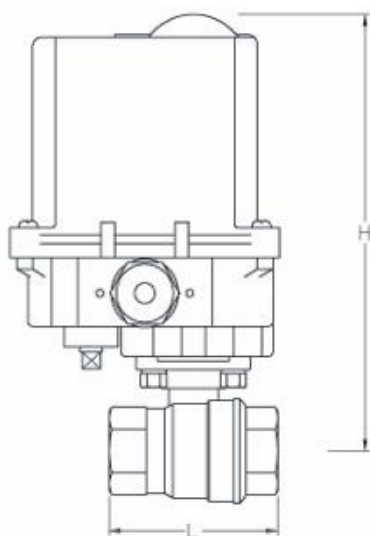

Wiring diagram :110/220 VAC (1-Phase)

