

Specifications:



Rated voltage	100~120VAC/1-ph 200~240VAC/1-ph
Acting time	12/10sec. (50/60Hz)
Media	Water, acidic and alkaline fluids
Fluid temp.	10~60°C Other temp. available on request
Pressure range	Max. 10 kgf/cm ²
Valve material	UPVC, CPVC, PP
Valve type	Butterfly valve
Control method	ON/OFF Modulating
Insulation	IP 67
Certification	CE



Optional

- Heater
- Auxiliary Switches
- Build-in LED position indicator
- Voltage: 12 VDC; 24VAC/DC
- Potentiometer (5k Ohm)


JS-03

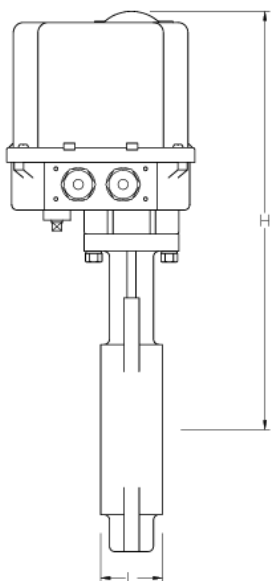


Dimension (mm)

MODEL	PIPE SIZE	L	H	D
JS-03-50-PVC-BTV	2"	43	303	163
JS-03-65-PVC-BTV	2-1/2"	46	314	163
JS-03-80-PVC-BTV	3"	49	326	163
JS-03-100-PVC-BTV	4"	56	343	163
JS-03-125-PVC-BTV	5"	64	370	163

Wiring diagram :110/220 VAC (1-Phase)

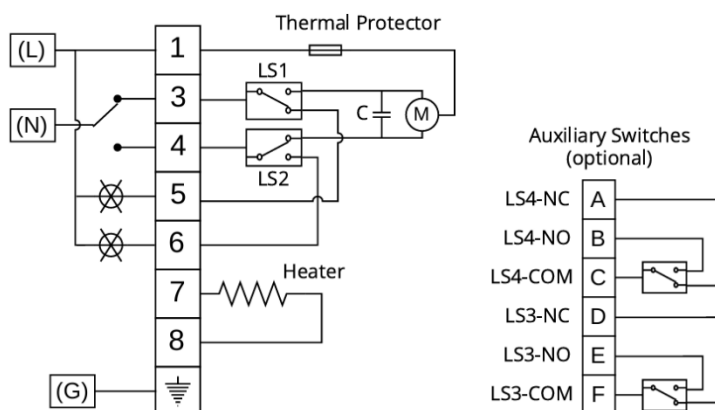

JS-03H~06H

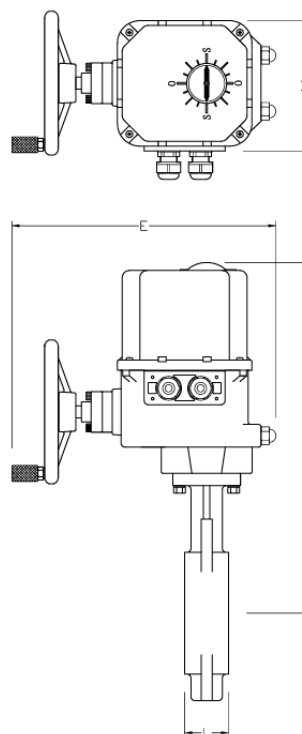

Dimension (mm)

MODEL	PIPE SIZE	L	H	D	E
JS-03H-50-PVC-BTV	2"	43	365	163	340
JS-03H-65-PVC-BTV	2-1/2"	46	379	163	340
JS-03H-80-PVC-BTV	3"	49	391	163	340
JS-03H-100-PVC-BTV	4"	56	408	163	340
JS-03H-125-PVC-BTV	5"	64	435	163	340
JS-03H-150-PVC-BTV	6"	70	446	163	340
JS-04H-200-PVC-BTV	8"	71	483	163	340
JS-05H-250-PVC-BTV	10"	114	526	163	340
JS-06H-300-PVC-BTV	12"	114	567	163	340